




Cable structure

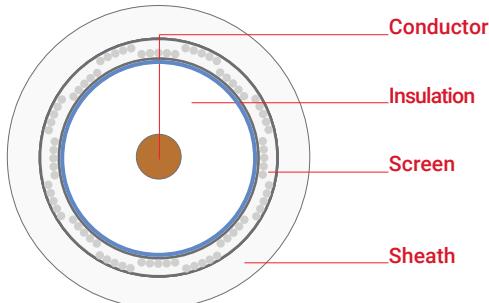

Electrolytic copper wire, Ø 1.02 mm (AWG18)

Physical foam PE, Ø 4.60 mm
70°C, EN 50290-2-23

Al-Pet-Sy foil min. 100% coverage
Aluminium braided wire
Al-Pet foil min. 100% coverage

PVC - RAL 9003 White, Ø 6.80 mm
TM51 70°C, EN 50290-2-22

Application

Utilising physical foam insulation technology, cables have a rated impedance of 75 ohms and comply with EN 50117. They are primarily used in Cable TV, individual/central satellite distribution and CCTV security camera systems.

Standards EN 50117, IEC 61196

Fire performance

Vertical flame propagation EN 60332-1-2

EU declaration of conformity

LVD	Low Voltage Directive	2014/35/EU
RoHS	Restriction of Hazardous Substances	2011/65/EU

Cable assembly length

Satellite distribution ²⁾	2150 MHz	60 m
VHF/UHF distribution ³⁾	860 MHz	150 m
S-band Cable TV distribution ³⁾	470 MHz	210 m

Specifications

Operating temperature	-30°C ...+70°C	
Bending radius	min. 10 x D	
Impedance	75 ± 3 Ω	
Capacitance	52 ± 2 pF/m	
Velocity of propagation	(84 ± 2)%	
Insulation resistance	min. 2 GΩ x km	
Operating voltage	max. 1300 V	
Test voltage	3000 V	
Attenuation @20°C	max.	4.74 dB/100 m 9.29 dB/100 m 14.35 dB/100 m 19.72 dB/100 m 21.37 dB/100 m 32.52 dB/100 m 34.59 dB/100 m 39.26 dB/100 m
Return loss ¹⁾	5-470 MHz	>20 dB >18 dB >16 dB >15 dB
Segregation class	"c" EN 50174-2	

¹⁾ According to EN 50117, 3 return loss peaks, whose value exceeds the limit by a maximum of 4 dB, are permissible.

²⁾ Maximum applicable length in 20 dBµV satellite distribution without line amplifier

³⁾ Maximum applicable length in 30 dBµV VHF/UHF and S-band Cable TV without line amplifier

Product code	Cable structure	Diameter [mm]	Copperweight [kg/km]	Cable weight [kg/km]	Sheath colour	Packaging [m]
307063	RG 6 U/4 PHY-PVC Cu/Al Trishield	6.80	7.3	40	<input type="checkbox"/> White (RAL 9003)	100/500/1000

Specifications may vary depending on technical modifications.